

MODEL 729830-P DUAL STATION CONTROL FOR 298-5, 503 AND 503A SPOTLIGHTS


INSTALLATION AND OPERATION INSTRUCTIONS

IMPORTANT!
READ THESE INSTRUCTIONS BEFORE
INSTALLING THIS PRODUCT.

KEEP THESE INSTRUTIONS FOR FUTURE REFERENCE.

Your Dual Station Kit includes the following:

- 1- Splitter wire sets (total of 6 color coded wire sets).
- 2- One control panel with Gasket, Hardware, One Control Manual
- 3- One Interconnect Cable, 15 ft long.
- 4- One Installation Manual

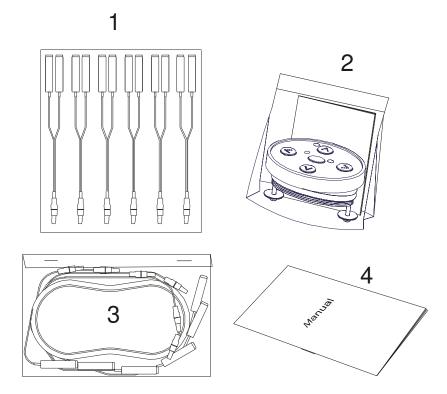

Mounting the Control Panel

Mount the Control panel according to its instruction manual.

Electrical connections

The Guest Model 503 spot/flood light has two types of wiring connections.

They are:

- Power supply wires the red (+) and black (-) wires that bring 12 volts DC power to the spot/flood light and to the control panel.
- Control cable wires the small wires within a gray casing that carry your commands from the control panel to the spot/flood light.

CAUTION!

DO NOT CONNECT THE CONTROL WIRES (with connectors)

TO ANY POWER SUPPLY WIRES.


DO NOT REVERSE THE RED (POSITIVE) AND BLACK (NEGATIVE) POWER WIRES.

This spotlight requires a power source of 12-volt DC power that is capable of supplying 10 amps of current even when other equipment is operating. For best results, run two new power supply wires from the red (+) and black (-) power wires of the light directly to the main 12-volt DC accessory panel. Install fuses and fuse holders as shown in diagram. A 10-amp circuit breaker can be installed instead of an in-line 10-amp fuse. If the light will be mounted less

than 30 feet, (9m) from its power source, use 12-gauge (3mm) power supply wires. If the distance will be more than 30 feet, (9m) use 10 gauge (5mm) wires.

An In-line 2amp fuse and holder should be installed on the red 22 awg power wire for each control.

Complete the wiring connections using the items included in kit as shown below:

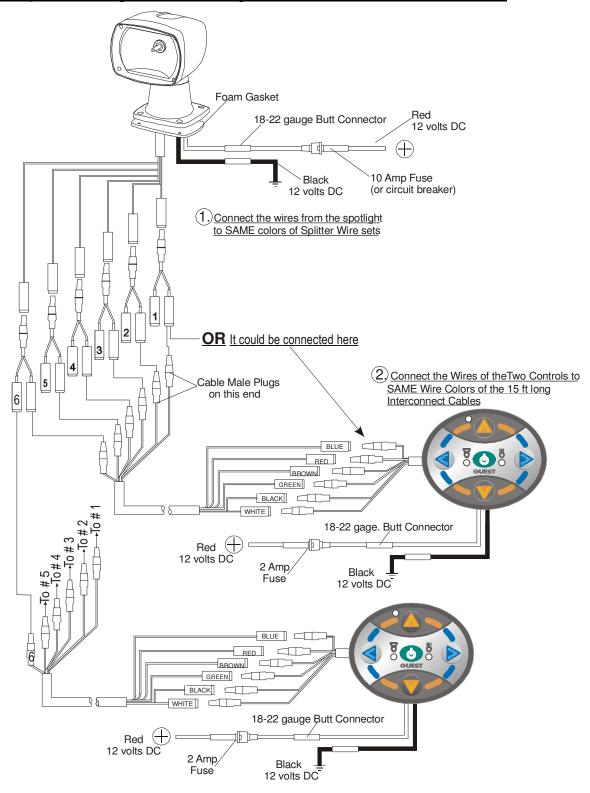

730605.doc 3429 3

Precautions

DO NOT look directly into the spotlight or floodlight while it is operating.

DO NOT cover the light with a fabric cover or any other flammable material. Accidental activation may result in a fire hazard.

DO turn the spotlight toward the control station when not in use. If the spotlight is accidentally activated during daylight, the operator will be more likely to notice and turn the spotlight off before draining a battery.

LIMITED WARRANTY

For one (1) year from the date of original purchase, The Guest Co. will, at its discretion, repair or replace for the original consumer, free of charge, any parts found defective in material or workmanship. All transportation charges under this warranty must be borne by the consumer.

Proof of purchase is required: A computerized register receipt is required. Hand-written receipts are not accepted for warranty proof of purchase. In the absence of a receipt, warranty period will be calculated from date of manufacture printed or stamped on the product.

There is no other expressed warranty. Implied warranties, including those of merchantability and fitness for a particular purpose, are limited to one year from the date of purchase. This is the exclusive remedy and consequential damages are excluded where permitted by law.

Tel: (707) 226-9600 Email: <u>info@marinco.com</u>
Fax: (707) 226-9670 Website: <u>www.marinco.com</u>

730605.doc 3429 4