
# SEAVIEW// ELEVATE YOUR ELECTRONICS

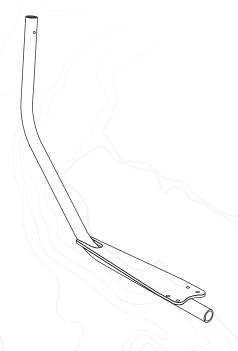

# INSTALLATION INSTRUCTIONS


For Seaview Modular Light Bars:

LTB-OA, LTB-OA6

Refer to website for most up to date instructions and videos.

WWW.SEAVIEWGLOBAL.COM

#### **PARTS INCLUDED**




#### **TOOLS NEEDED**




Sudbury Elastomeric Marine Sealant is recommended. To purchase call 800-655-7922 or visit www.seaviewglobal.com




Route wiring through the Light Bar and then insert light into Light Bar. Procedure may vary depending on which light bar top you have. Refer to the Seaview Light Bar Top instructions.

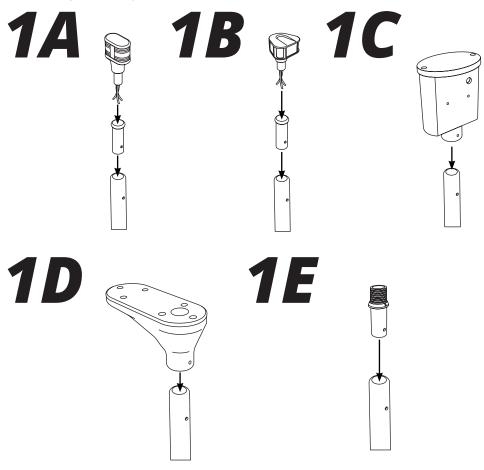

Once your Light Bar Top is in place secure it with the two black rivets. Apply marine adhesive sealant around the holes of the rivets.




### Insert the Light Bar into the back of the Seaview mount.





Secure the LTB-OA or LTB-OA6 to the Seaview Modular Top Plate by using the four 5/16"x1" bolts and washers.


## Make sure that the Light Bar is level.




#### **OPTIONAL ACCESSORIES**

Call 800-655-7922 or visit www.seaviewglobal.com for available accessories.

#### **LIGHT BAR TOPS**



**LTBP-1197** Perko 1197 incandescent Light.



**LTBA-7800** Attwood LED Light.




**LTBU1A1197** Light Bar Top with Perko 1197 Light, can fit GPS.




**LTBU1A800**Light Bar Top with Attwood LED Light, can fit GPS.

#### **SPREADER KIT**




**SP1-MOD**Allows user to mount GPS units or antennas onto a Seaview Modular Mount.

#### **WEDGES**




Compensates for plane angle. Available in 2, 4 or 6 degree wedges.



Seaview Hinge Adapters fold in any direction necessary for added height clearance.

#### **CABLE GLANDS**



Seaview Cable Glands provide waterproof cable routing.



**SEAVIEW**//

Tel: 800-655-7922 www.seaviewglobal.com/

**EUROPEAN OFFICE** 

Tel: +33 4 94 53 27 70 www.seaviewprogress.com