


## Eye strap - Dia 4 mm - Spacing: 30 mm

Part #9201

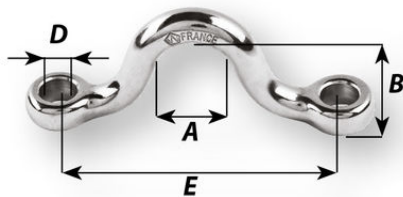

### Description

Complete range of drop-forged saddles with high quality stainless steel (316L)  
Outstanding strength  
The round shape reduces the wear of the components connected to them (straps, ropes...)

### Applications

Fastening applicationsique  
Fixation de sangles, de cordages etc..

## Technical information

|                    |                            |
|--------------------|----------------------------|
| Materials          | 316L stainless steel grade |
| Breaking load (lb) | 1430                       |
| Weight (lb)        | 0.009                      |
| A (inch)           | 5/16"                      |
| B (inch)           | 7/16"                      |
| D diameter (inch)  | 5/32"                      |
| E (inch)           | 1 17/64"                   |

### Caption



Working load (WL) : for nautical applications



Working Load Limit (WLL): for industrial applications only.

The safety factor is 5 times the breaking load.  
WLL = Breaking load / 5

Wichard strives to ensure, to the best of its ability, the accuracy and the update of the information disseminated on this document, and reserves the right to correct at any time and without notice the content, as well as to evolve its products.

In the case of an industrial application, please contact our sales and technical department to validate the use of these products. The request for certificates can be made directly with the sales department when ordering the products.

Non-contractual pictures.