


## Round pad eye - Dia 57 mm - M6 screw

Part #6635

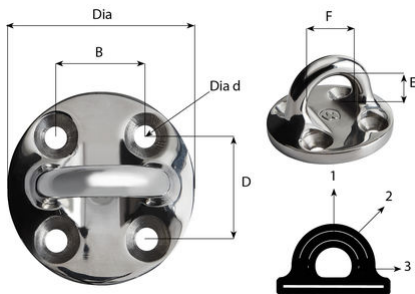

### Description


This fixed rounded pad-eye completes the range of fixed pad eyes and thus it can suit any user scenario. For example, it can be used for reefing blocks, fastening points on bowsprits and on blocks. Made from Duplex stainless steel, it offers excellent mechanical strength for its corrosion resistance. For M6 screw.

W.L 1 (90°) : 2300 Kg  
W.L 2 (45°) : 2050 Kg  
W.L 3 (0°) : 1950 Kg  
B.L 1 (90°) : 4550 Kg  
B.L 2 (45°) : 4100 Kg  
B.L 3 (0°) : 3900 Kg

### Applications

Reefing blocks  
Fastening points on bowsprit  
Blocks fastening

## Technical information

Materials	Duplex stainless steel grade
 Working load (kg)	2900
Breaking load (kg)	7800
Weight (g)	143
A (mm)	57
B (mm)	27
D (mm)	30
E (mm)	19
F (mm)	22

### Caption



Working load (WL) : for nautical applications



Working Load Limit (WLL): for industrial applications only.  
The safety factor is 5 times the breaking load.  
WLL = Breaking load / 5

Wichard strives to ensure, to the best of its ability, the accuracy and the update of the information disseminated on this document, and reserves the right to correct at any time and without notice the content, as well as to evolve its products.

In the case of an industrial application, please contact our sales and technical department to validate the use of these products. The request for certificates can be made directly with the sales department when ordering the products.

Non-contractual pictures.