


## Self-locking twisted shackle - Dia 10 mm

Part #1225

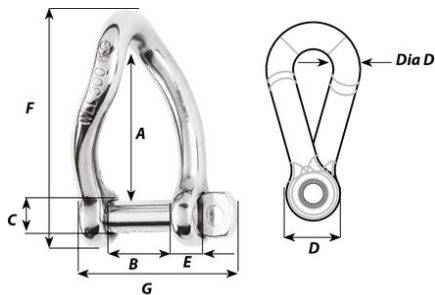

### Description

Self-locking twisted shackle forged in grade 316L stainless steel

The pin is locked into one of the indentations

No risks of loose due to vibrations



Outstanding working and breaking loads

### Applications

Perfect for application where a 90° angle twist setup is required

Often used to attach an unarticulated part (block on a rail) or on purchases

## Technical information

Materials	316 stainless steel grade
 Working load (lb)	3170
 WLL (lb)	1980
Breaking load (lb)	9920
Weight (lb)	0.28
A (inch)	1 31/32"
B (inch)	25/32"
C (inch)	25/64"
D (inch)	3/4"
D diameter (inch)	25/64"
E (inch)	23/64"
F (inch)	2 29/32"

### Caption



Working load (WL) : for nautical applications



Working Load Limit (WLL): for industrial applications only.  
The safety factor is 5 times the breaking load.  
WLL = Breaking load / 5

Wichard strives to ensure, to the best of its ability, the accuracy and the update of the information disseminated on this document, and reserves the right to correct at any time and without notice the content, as well as to evolve its products.

In the case of an industrial application, please contact our sales and technical department to validate the use of these products. The request for certificates can be made directly with the sales department when ordering the products.

Non-contractual pictures.